

CATALOGUE OF PRODUCTS

ROOF PANEL · FACADE · WALL · COLD STORAGE · ARCHITECTONIC
FACADE · COMPOSITE SLAB · PROFILED SHEETING · SELFSUPPORTING
TRAY · LIGHTING PANEL · ROOF



Hiansa
Grupo Hiemesa



HIANSA PRESENTATION

Hiansa is one of the leading manufacturers and suppliers of lacquered steel for roofs and façades, an essential application in industrial construction.

The advantages of shaped lacquered steel are its light weight, its mechanical strength, its ease of transportation and handling, its speed of assembly and the multiple aesthetic possibilities, which, in the case of Hiansa, include a variety of finishes and coverings: galvanised, lacquered (range of colours), aluzinc, etc.

At Hiansa, the most innovative designers will find a wide range of products and a suitable response to the technical, functional and aesthetic requirements of façade and roof closures for modern architecture.

Meanwhile, with the unstoppable technical progress of light metal closures, Hiansa has developed a comprehensive range of profiles guaranteeing the majority of solutions designed.

All our products are recognised for their competitive quality. This range does not just include profiles, but a wide range of finishes and special parts to finish the project: curved, drilled profiles, sandwich panels with rigid polyurethane and polyisocyanurate foam insulation, refrigeration panels, self-supporting trays and complementary natural lighting (translucid integrated modules), ventilation and insulation systems, composite slab sheeting, DECK coverings, finishes, etc.

PANEL CUB 2GR/3GR

ROOF PANEL WITH FLASHING



EXTERIOR FACE:
Pre-painted steel


INTERIOR FACE:
Pre-painted steel, centesimal aluminium, bitumen. cardboard

USEFUL WIDTH 1000 mm

INSULATION:
Polyurethane (PUR) and Polyisocyanurate (PIR)


THICKNESS (mm):
30/40/50/60/80/100

USE:
Sloping roof surfaces



PANEL AGRO 3GR

ROOF PANEL WITH FLASHING FOR AGRICULTURAL USE

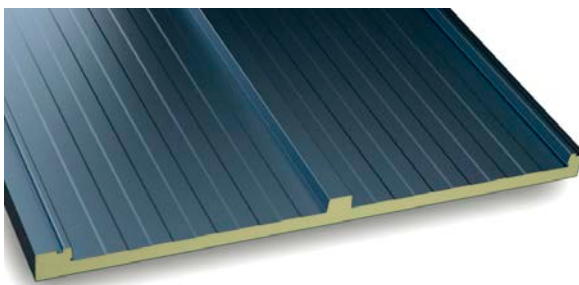

EXTERIOR FACE:
Pre-painted steel


INTERIOR FACE:
Polyester

USEFUL WIDTH 1000 mm

INSULATION:
Polyurethane (PUR) and Polyisocyanurate (PIR)


THICKNESS (mm):
30/40/50

USE:
Sloping roof surfaces



EASY CUB 3GR/5GR

ROOF PANEL WITHOUT FLASHING

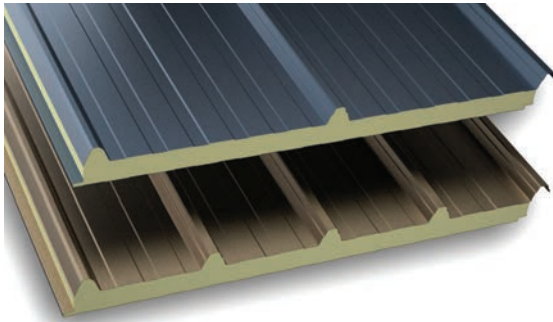

EXTERIOR FACE:
Pre-painted steel


INTERIOR FACE:
Pre-painted steel

USEFUL WIDTH 1000 mm

INSULATION:
Polyurethane (PUR) and
Polyisocyanurate (PIR)


THICKNESS (mm):
30/40/50

USE:
Sloping roof surfaces

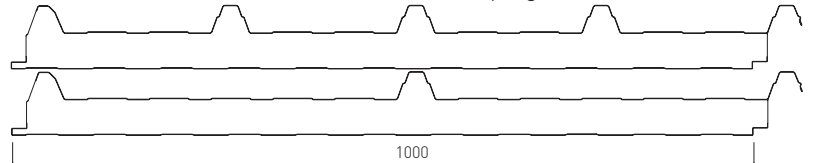

EASY AGRO 3GR/5GR

ROOF PANEL WITH UT FLASHING FOR AG RICULTURAL USE

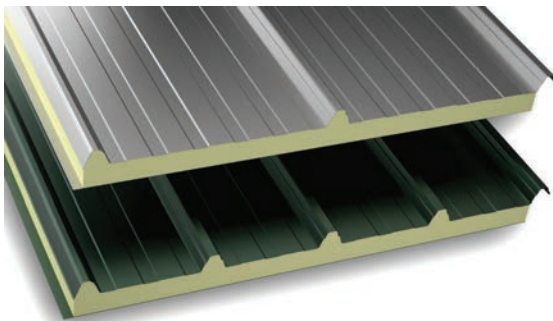

EXTERIOR FACE:
Pre-painted steel


INTERIOR FACE:
Polyester

USEFUL WIDTH 1000 mm

INSULATION:
Polyurethane (PUR) and
Polyisocyanurate (PIR)


THICKNESS (mm):
10/30

USE:
Sloping roof surfaces

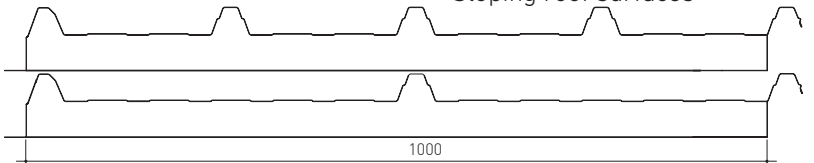

EASY ALU 3GR/5GR

ROOF PANEL WITHOUT FLASHING

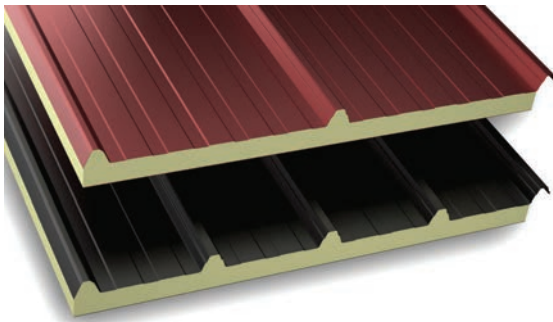

EXTERIOR FACE:
Pre-painted steel


INTERIOR FACE:
Centesimal aluminium

USEFUL WIDTH 1000 mm

INSULATION:
Polyurethane (PUR) and
Polyisocyanurate (PIR)


THICKNESS (mm):
10/30

USE:
Sloping roof surfaces

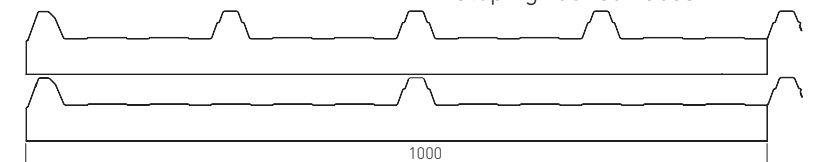

EASY BOARD 3GR/5GR

ROOF PANEL WITHOUT FLASHING

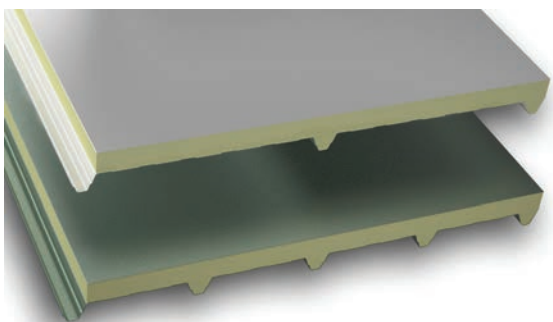

EXTERIOR FACE:
Pre-painted steel


INTERIOR FACE:
Bituminous cardboard

USEFUL WIDTH 1000 mm

INSULATION:
Polyurethane (PUR) and
Polyisocyanurate (PIR)

THICKNESS (mm):
10/30

USE:
Sloping roof surfaces and DECK

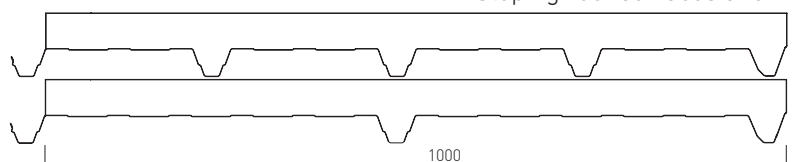

PANEL TEJA

PANEL DE CUBIERTA



EXTERIOR FACE:
Pre-painted steel

INTERIOR FACE:
Pre-painted steel

EXTERIOR COLOUR FINISH:
Aged white
Roof red
Slate


USEFUL WIDTH 1000 mm

INTERIOR COLOUR FINISH:
Standard colours
Wood finish

INSULATION: Polyurethane (PUR) and Polyisocyanurate (PIR)

THICKNESS (mm):
20/30/40

USE:
Sloping roof surfaces

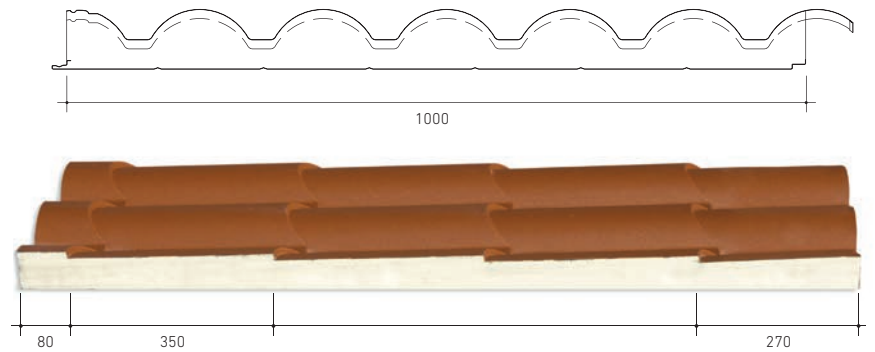

DIE-CUT RIDGE TILE




SILHOU




DIE-CUT OVER WALL CLOSURE



FLAT RIDGE TILE

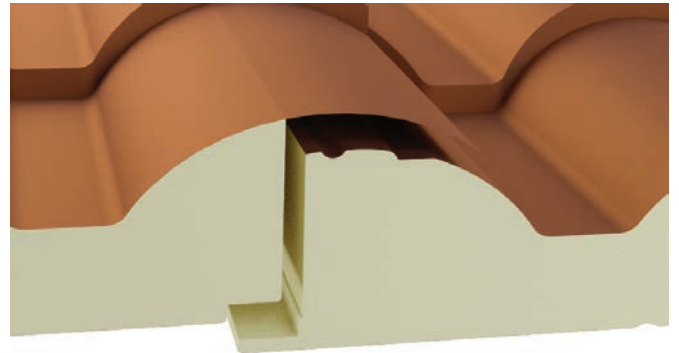


GUTTER



DIE-CUT ON-WALL CLOSURE



TYPE "A" SIDE CLOSURE



CHANNEL COVER



TYPE "C" SIDE CLOSURE




TYPE "B" SIDE CLOSURE



HONEYCOMB POLYCARBONATE

LIGHTING PANEL WITH FLASHING

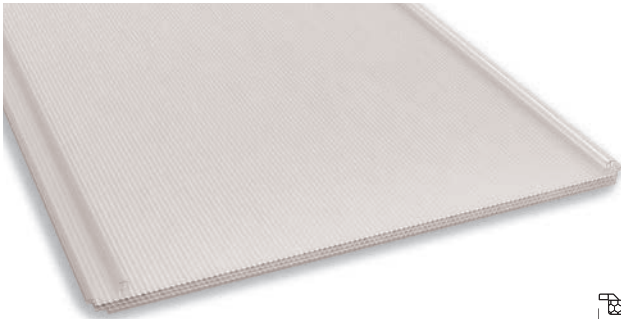


COMPOSITION:
Honeycomb polycarbonate

USEFUL WIDTH 1000 mm

THICKNESS (mm):
30

USE:
Roofs



HIANSAPLUS

LIGHTING PANEL WITH FLASHING




COMPOSITION:
Honeycomb polycarbonate

USEFUL WIDTH 1000 mm


THICKNESS (mm):
30

USE:
Roofs

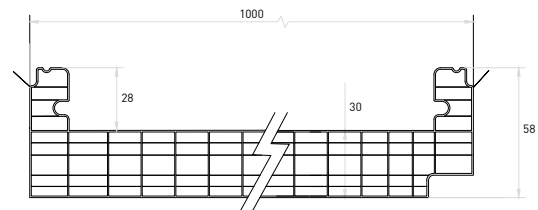

POLIMER

LIGHTING PANEL WITHOUT FLASHING

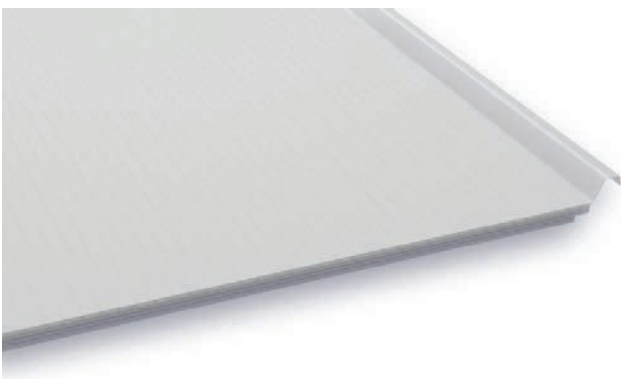


COMPOSITION:
Honeycomb polycarbonate

USEFUL WIDTH 1000 mm


THICKNESS (mm):
30

USE:
Roofs

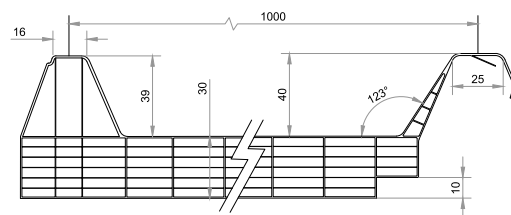

COMPACT POLYCARBONATE

SKYLIGHT

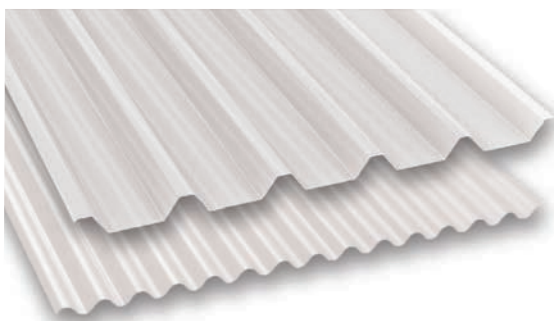

COMPOSITION:
Compact polycarbonate

AVAILABLE FOR:
MO-18, MT-32, MT-42 y MT-52

THICKNESS (mm):
1.0


Other thicknesses to consult



USE:
Facades
Roofs

PANEL FACHADA MPF/PRF/SML/LIS

FACADE PANEL

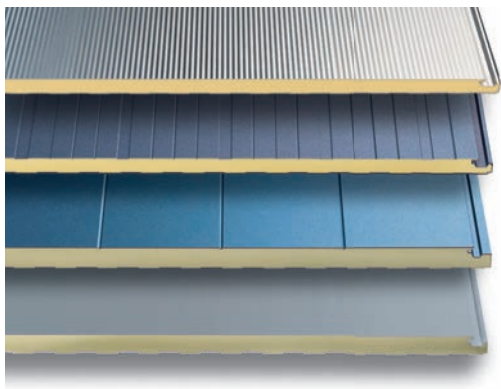


EXTERIOR / INTERIOR FACE:
Pre-painted steel

THICKNESS (mm):
35/40/50/60/80/100

INSULATION:
Polyurethane (PUR) and
Polyisocyanurate (PIR)


USE:
Facades

USEFUL WIDTH 1100 mm



MURO

FACADE PANEL

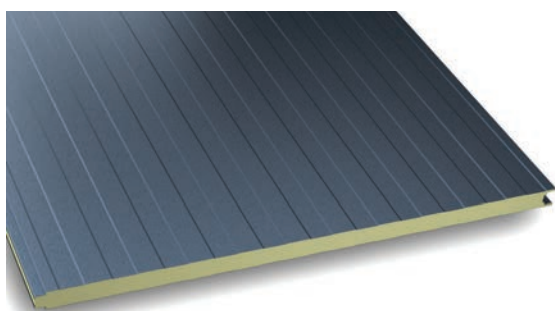

EXTERIOR FACE:
Pre-painted steel


INSULATION:
Polyurethane (PUR) and
Polyisocyanurate (PIR)

INTERIOR FACE:
Pre-painted steel

THICKNESS (mm):
30/40


USEFUL WIDTH 1000 mm

USE:
Facades, prefabricated huts,
false ceilings, refrigeration
chambers and subdivisions



FRIGO

REFRIGERATION PANEL

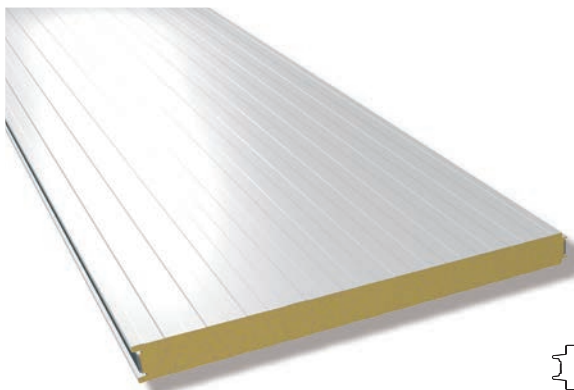

EXTERIOR FACE:
Pre-painted steel

INSULATION:
Polyurethane (PUR) and
Polyisocyanurate (PIR)

INTERIOR FACE:
Pre-painted steel

THICKNESS (mm):
60/80/100/120/140/160
180/200


USEFUL WIDTH 1100 mm

USE:
Refrigeration chambers
and subdivisions




COLOURS

FINISHES

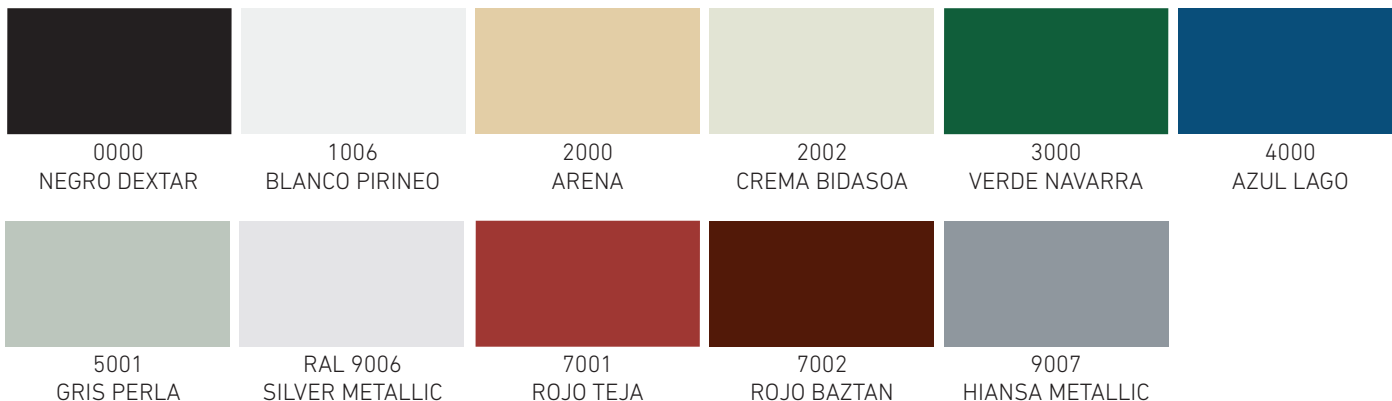

MO -18 MINIONDA

MINIONDA PROFILED SHEET

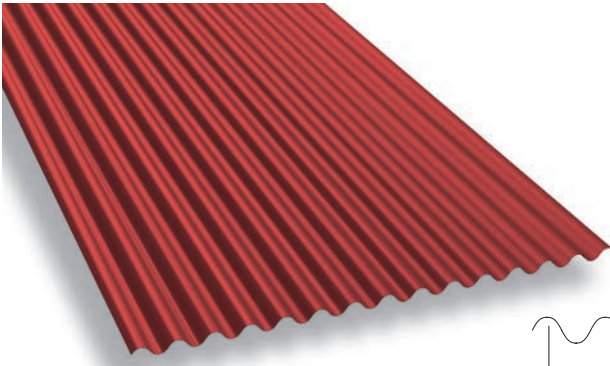

FINISH:
Pre-painted/Galvanised


USEFUL WIDTH 1064 mm



THICKNESS (mm):


Up to 1.2

USE:
Facades
Roofs



MT-32 / MT-32 F

PROFILED SHEETS

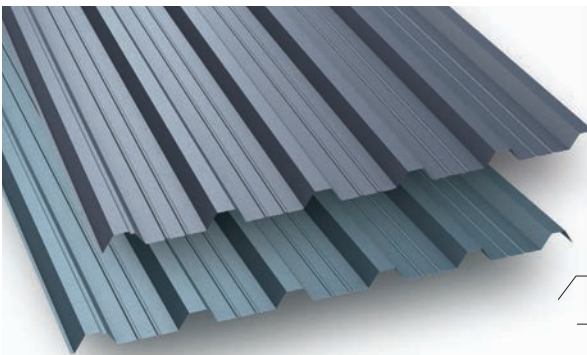

FINISH:
Pre-painted/Galvanised


USEFUL WIDTH 1000 mm



THICKNESS (mm):


Up to 1.2

USE:
Facades
Roofs



MT - 42

PROFILED SHEETS

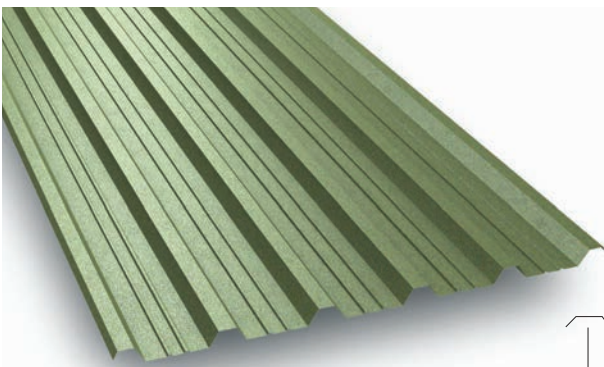

FINISH:
Pre-painted/Galvanised


USEFUL WIDTH 1000 mm



THICKNESS (mm):


Up to 1.2

USE:
Facades, Roofs and
Deck Roofs



MT - 52

PROFILED SHEETS

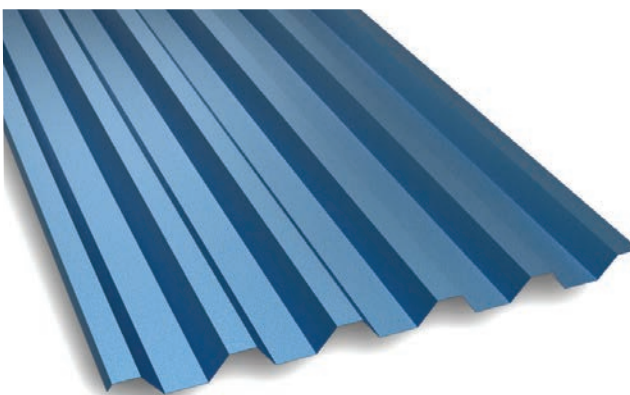

FINISH:
Pre-painted/Galvanised


USEFUL WIDTH 895 mm



THICKNESS (mm):

Up to 1.2

USE:
Facades, Roofs and
Deck Roofs



MT - 44 IBIZA

ARCHITECTURAL FACADES




FINISH:
Pre-painted

USEFUL WIDTH 1010 mm




THICKNESS (mm):
Up to 1.2

USE:
Facades



FORJADO MT - 60

COMPOSITE SLAB

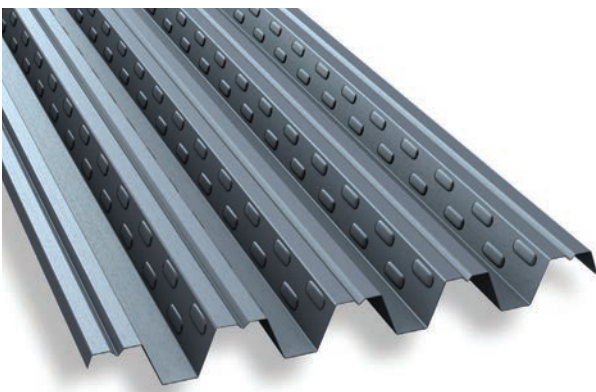


FINISH:
Galvanised

USEFUL WIDTH 820 mm

THICKNESS (mm):
Up to 1.2

USE:
Composite slab



FORJADO MT - 76

COMPOSITE SLAB




FINISH:
Galvanised

USEFUL WIDTH 880 mm

THICKNESS (mm):
Up to 1.2

USE:
Composite slab



FORJADO MT - 100

COMPOSITE SLAB




FINISH:
Galvanised


USEFUL WIDTH 675 mm

THICKNESS (mm):
Up to 1.2

USE:
Composite slab

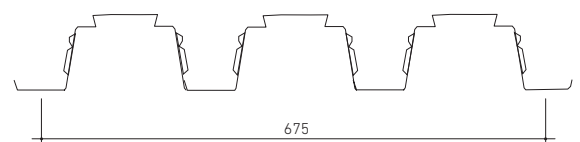

BANDEJA 130.600

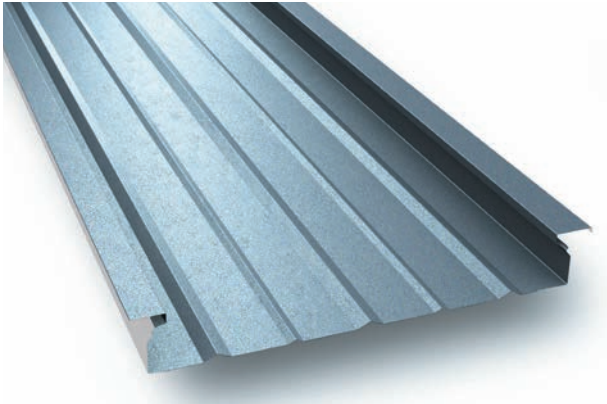

FINISH:
Pre-painted/Galvanised


USEFUL WIDTH 600 mm




SELF-SUPPORTING TRAY

THICKNESS (mm):
From 0.7 up to 1.2

USE:
Facades
Roofs

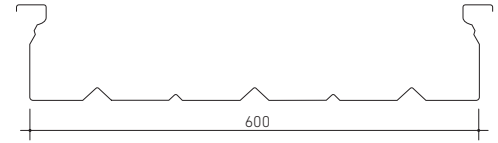

BANDEJA 90.380

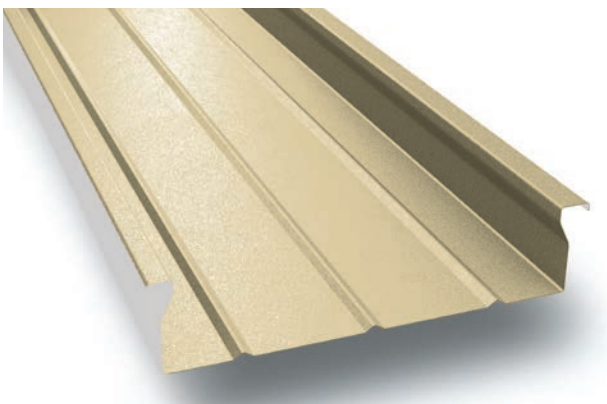

FINISH:
Pre-painted/Galvanised


USEFUL WIDTH 380 mm



SELF-SUPPORTING TRAY

THICKNESS (mm):
From 0.7 up to 1.2

USE:
Facades
Roofs



MT - 56 DECK




FINISH:
Pre-painted/Galvanised

USEFUL WIDTH 952 mm




THICKNESS (mm):
From 0.7 up to 1.2

USE:
Deck roofs



DECK ROOFS

MT - 68 DECK

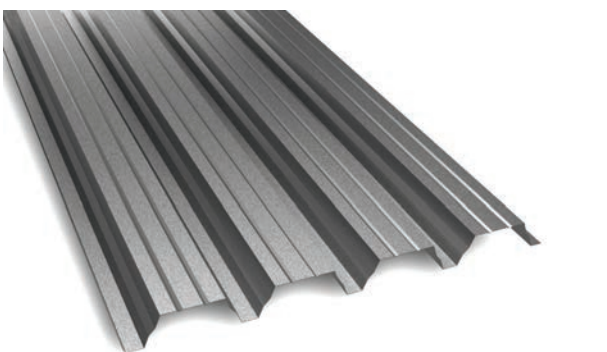


FINISH:
Pre-painted/Galvanised

USEFUL WIDTH 880 mm



THICKNESS (mm):
From 0.7 up to 1.2

USE:
Deck roofs



DECK ROOFS



DISTRIBUTED BY:



Polígono Industrial Dehesa de las Cigüeñas
parcela A1
14420 VILLAFRANCA DE CÓRDOBA (ESPAÑA)
Tel. +34 957 198 900
Fax +34 957 198 910

www.hiansa.com

